


Socket Head Screw
DIN 912 ISO 4762

ברגי אלן עם ראש 12.9

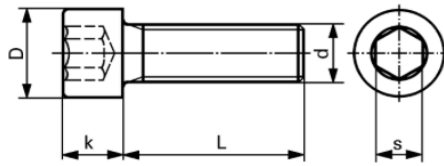

M10	M8	M7	M6	M5	M4	M3	M2.5	M2	M1.6	M1.4	d
8	6	5	5	4	3	2.5	2	1.5	1.5	1.3	s
10.0	8.0	6.0	6.0	5.0	4.0	3.0	2.5	2.0	1.6	1.4	k max
16	13	11	10	8.5	7	5.5	4.5	3.8	3	2.6	D

M36	M30	M27	M24	M22	M20	M18	M16	M14	M12	d
27	22	19	19	17	17	14	14	12	10	s
36.0	30.0	27.0	24.0	22.0	20.0	18.0	16.0	14.0	12.0	k max
54	45	40	36	33	30	27	24	21	18	D

3/8"	5/16"	1/4"	3/16"	8-32"	6-32"	5-40"	4-40"	2-56"	1-64"	d
0.375	0.313	0.250	0.19	0.164	0.138	0.125	0.112	0.086	0.073	Decimal Equiv.
5/16	1/4	3/16	5/32	9/64	7/64	3/32	3/32	5/64	1/16	s
3/8	5/16	1/4	0.19	0.164	0.138	0.125	0.112	0.086	0.073	k
9/16"	15/32	3/8"	0.312	0.270	0.226	0.205	0.183	0.140	0.1	D

1 1/8"	1"	7/8"	3/4"	5/8"	9/16"	1/2"	7/16"	d
1.125	1.000	0.875	0.750	0.625	0.563	0.500	0.438	Decimal Equiv.
7/8	3/4	3/4	5/8	1/2	7/16	3/8	3/8	s
1 1/8	1	7/8	3/4	5/8	0.563	1/2	7/16	k
1.7	1.5	1.3	1.1	15/16	0.844	3/4"	21/32	D